



CLASSIC Series | TCM 028K Coriolis Mass Flow Meter

FEATURES

- Robust, no moving parts for long life
- Custom flow connectors & installation lengths
- Excellent repeatability (± 0.05 % of flow rate)
- Optional Net Oil functionality

BENEFITS

- ▶ Increased productivity, less maintenance
- ▶ Lower installation cost
- ▶ Increased product quality
- ▶ Simpler whole solution for Net Oil without PLC/RTU

FLOW RATE

Mass Flow Rate (max.):	28,000 kg/h [1,029 lb/min]
Volumetric Flow Rate (max.):	28,000 l/h [123.3 gpm, 4,227 oil bbl/d (US)]
Nominal Meter Size:	DN25 [1"]

PRESSURE RATING	100 bar [1,450 psi]
-----------------	---------------------

ACCURACY (LIQUIDS)¹⁾

Basic Accuracy (Mass Flow) ²⁾ :	± 0.3 % (option: up to ± 0.1 %) of flow rate
Repeatability (Mass Flow):	± 0.05 % of flow rate
Basic Accuracy (Volume Flow) ²⁾ :	± 0.3 % (option: up to ± 0.15 %) of flow rate
Repeatability (Volume Flow):	± 0.05 % of flow rate
Zero Stability:	± 0.01 % of full scale

ACCURACY (GASES)

Basic Accuracy (Mass Flow) ²⁾ :	± 1 % (option: up to ± 0.5 %) of flow rate
Repeatability (Mass Flow):	± 0.25 % of flow rate

DENSITY


Density Range:	up to 2,500 kg/m ³ [2.5 g/cm ³]
Density Accuracy ²⁾ :	± 1.0 kg/m ³ [± 0.001 g/cm ³]
Density Repeatability:	± 0.5 kg/m ³ [± 0.0005 g/cm ³]

TEMPERATURE

Process Temperature Range:	-40 °C ... +100 °C [-40 °F ... +212 °F] Option: -60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	± 1 °C ± 0.5 % of reading [± 1.8 °F ± 0.5 % of reading]
Temperature Repeatability:	± 0.2 °C [± 0.36 °F]

MATERIALS (WETTED PARTS)


Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	CF3M [AISI 316L]
Brazing Alloy:	BNi-2

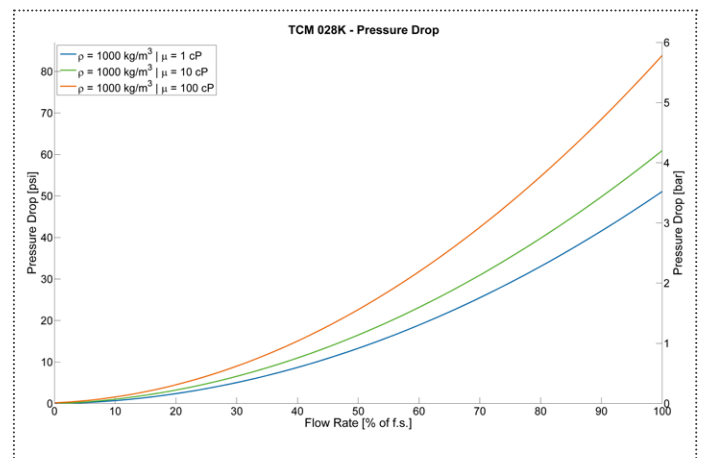

¹⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
²⁾ The specifications refer to standard conditions (for further information see TCM CLASSIC series manual).



CLASSIC Series | TCM 028K Coriolis Mass Flow Meter

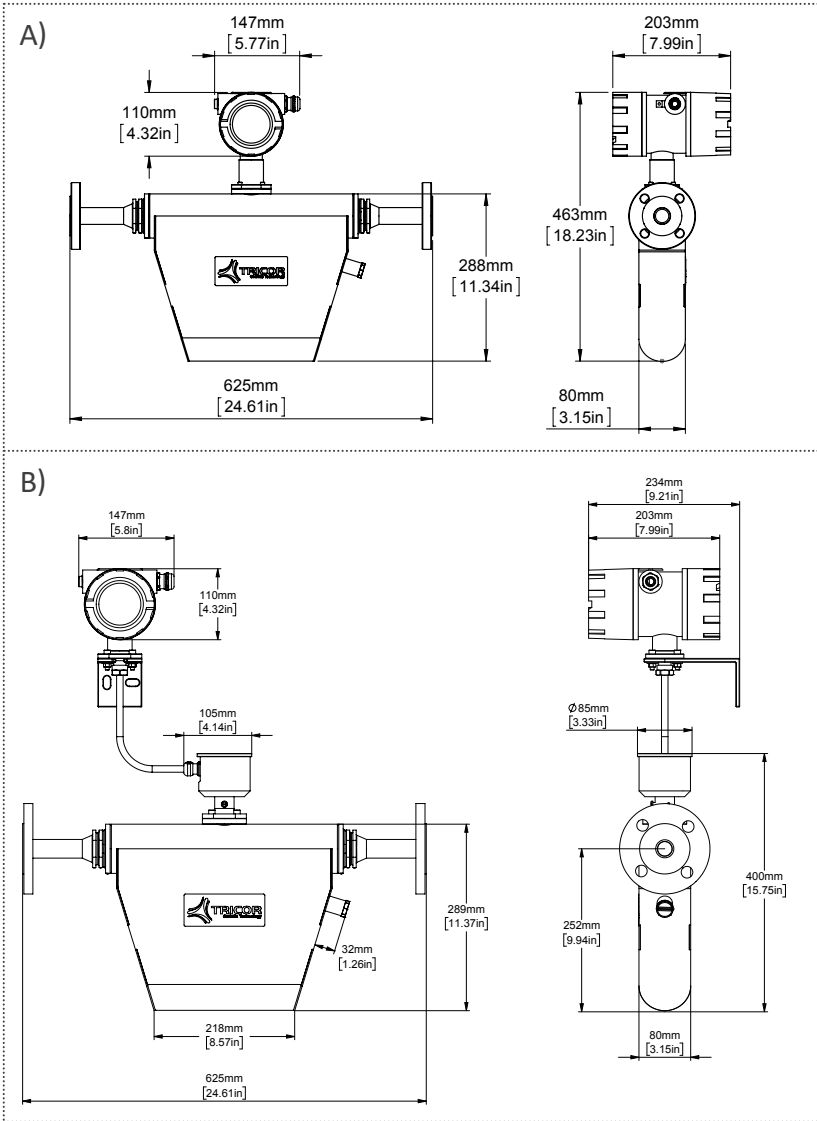

METER DIMENSIONS³⁾ AND WEIGHTS

A) Compact Version

Weight: 13.1 kg [28.9 lb]

With meter mount in aluminum diecast housing

B) Remote Version

Weight: 14.4 kg [31.7 lb]

With junction box and remote field mount

Standard Process Connection

DN25 PN40 [1" ANSI CL 300] (others on request)

EX-CERTIFICATIONS

ATEX	Zone 1:	Group IIC or IIB, T2...T4
	Zone 2:	II 3G Ex nA IIC T2...T4 Gc
IECEX	Zone 1:	Group IIC or IIB, T2...T4
cCSAus ⁵⁾	Class 1, Division 1:	Group A, B, C, D or C, D, T2...T4
ATEX + IECEx + cCSAus triple approval ^{6) 7)}	Zone 1:	Group IIC or IIB, T2...T4
	Class 1, Division 1:	Group A, B, C, D or C, D, T2...T4
EAC (TR-CU) ⁶⁾		Group IIC or IIB, T2 ... T4

PANEL MOUNT⁴⁾



REMOTE MOUNT⁵⁾



ELECTRONICS

Power Supply: 24 V DC \pm 20 % or 90 ... 264 V AC
 Outputs: Analog, Frequency, Pulse, Status
 Interfaces: RS485 RTU (Modbus), HART[®]
 Cable Gland: M20 | 1/2" NPT

³⁾ Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁴⁾ Weight: 0.4 kg [0.88 lb].

⁵⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].

⁶⁾ For Ex1, Ex3, EAC (TR-CU) the electronic is only available in aluminum housing.

⁷⁾ Only with remote electronics.

www.tricorflow.com

N & S AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
 KEM Küppers Elektromechanik GmbH
 1 Magazine Road #04-01
 Central Mall Office Tower
 Singapore 059567
 +65 6347 6162

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567



REST OF WORLD
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100