VUE-2190

Panel Mount Monitor




Features

- 19.0" active screen size Full-flat cover glass for extremely simple and elegant surface design
- Anti-glare (AG) treatment on screen for comfortable viewing experience
- Front IP65 and Side IPX1 dust and water-proof rating
- Support 10-point touch function (PCAP techology)

Specifications

Model			PCAP Touch
Brand			Advantech
	Active Screen Size		19" TFT Active Matrix Panel
Display	Resolution		1280 x 1024 (SXGA)
	Brightness (nits)		250 nits (Without Touch); 225 nits (with PCAP touch)
	Contrast Ratio		1000 : 1 (typ)
	Aspect Ratio		5:4
	Viewing Angle		170° (H) / 160° (V)
	Response Time		5 ms (typ.)
	Backlight Life (hours)		30,000 (typ.)
Touch	Touch Type		Projected Capacitive
	Touch Function		10 Points
	Touch Interface		USB-HID (Type B)
	Surface hardness		7H
	Accuracy		±2.5mm
	Transparency		≥ 85%
Connectivity	Video Input		VGA x1, DVI-D x1
	Audio input		-
	Other Slot/Ports		RJ11 for extension OSD, USB 2.0 (Type B) for PCAP Touch
Control	OSD Language		English, French, Deutsch, Italian, Spanish, Japanese, Traditional Chinese & Simplified Chinese
	Power Type		External Adapter, AC to DC, 12V
Power	Power Input		100-240V _{AC} , 50-60Hz, 2.5A
	Power Consumption		30W (typ.)
Environment	Operating	Temperature	0° ~40°
		Humidity	20%~80% RH, Non-Condensing
	Storage	Temperature	-20° ~60°
		Humidity	10%~90% RH, Non-Condensing
Mechanical Specification	Housing Color		Black, Silver (No Paint on Back side)
	Housing Material		Glass, SECC Metal
	Compliance		IP65 Compliant Front side ; IPX1 Back Side
	VESA Compatibility		100 x 100 mm
	Dimensions (W x H x D)	Physical without Packing	415.0 x 343.0 x 46.6 mm
		Packing	500 x 425 x 133 mm
	Weight	Net	4.4 kg
		Gross	6.3 kg
Approbation	Certificate		CE, FCC

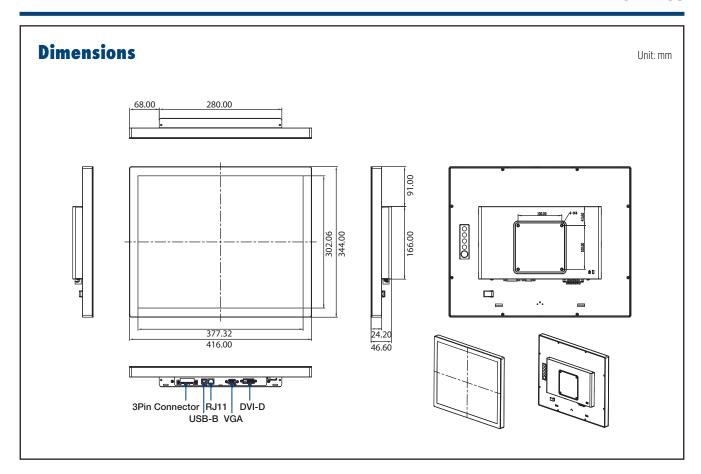

Ordering Information

Part Number	Description	Packing List
VUE-2190-SX25PX-A0	Advantech 19" SXGA Panel Mount Monitor (incl. Europe Power Cord)	 Power Cord Power Adapter USB Cable (For PCAP Touch) DVI Cable Side Mount Bracket Kit