



NOMINAL FLOW RATE (* reference gases)

*@ 20°C air, pressure drop 10 bar: 394 kg/h @ 1,050 bar
[14.5 lb/min @ 15,200 psi]
362 kg/h @ 690 bar
[13.3 lb/min @ 10,000 psi]
316 kg/h @ 414 bar
[11.6 lb/min @ 6,000 psi]

*@ 20°C H₂, pressure drop 50 bar: 254 kg/h @ 1,050 bar
[9.30 lb/min @ 15,200 psi]
240 kg/h @ 875 bar
[8.80 lb/min @ 12,690 psi]
222 kg/h @ 690 bar
[8.15 lb/min @ 10,000 psi]
184 kg/h @ 414 bar
[6.75 lb/min @ 6,000 psi]

PRESSURE RATING

TCMH 0450-HC-SPPS (-SPMS)¹⁾: 1,050 bar [15,200 psi]
TCMH 0450-HC-SRPS (-SRMS)²⁾: 690 bar [10,000 psi]
TCMH 0450-HC-SSPS (-SSMS)¹⁾: 414 bar [6,000 psi]

ACCURACY

Flow: ±1 % of flow rate
Mass Repeatability: ±0.5 % of flow rate
Zero Stability: 0.45 kg/h [0.0165 lb/min]
Temperature: ±1 °C ±0.5 % of flow rate
[±1,8 °F ±0.5 % of flow rate]

OPERATING CONDITIONS - PROCESS²⁾

Process Temperature Range: -40 °C ... +100 °C [-40 °F ... +212 °F]
Medium: Gas
Pressure Effect on Sensitivity: 0.0002 % / bar [0.000014 % / psi]

OPERATION CONDITIONS - ENVIRONMENT

Ambient Temperature: -40 °C ... +70 °C [-40 °F ... +158 °F]
Relative Humidity: max. 95 %

MATERIALS (WETTED PARTS)



Tubes¹⁾: 1.4404 [AISI 316L] or Sandvik Alloy HP160
Case: 1.4404 [AISI 316L]
Flow Splitter: 1.4404 [AISI 316L]

BURST PROTECTION

Rupture Disc: G½"

CONNECTIVITY


Flow Meter: ¾" Autoclave (MP) (others on request)
Signal Cable Connection: Push-Pull connector
For triple Ex approval (Ex3)³⁾

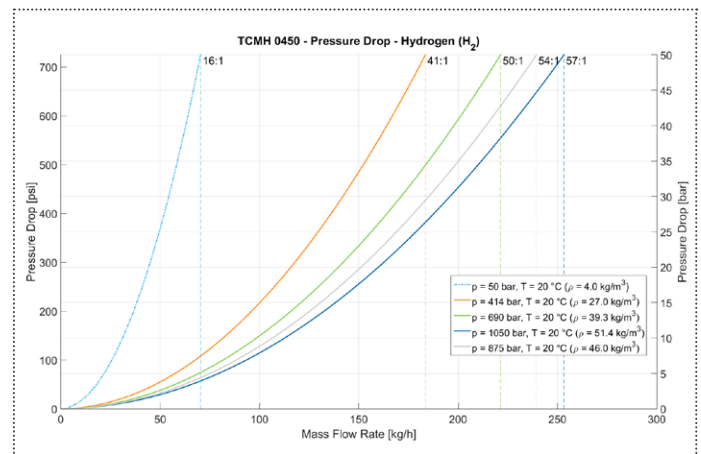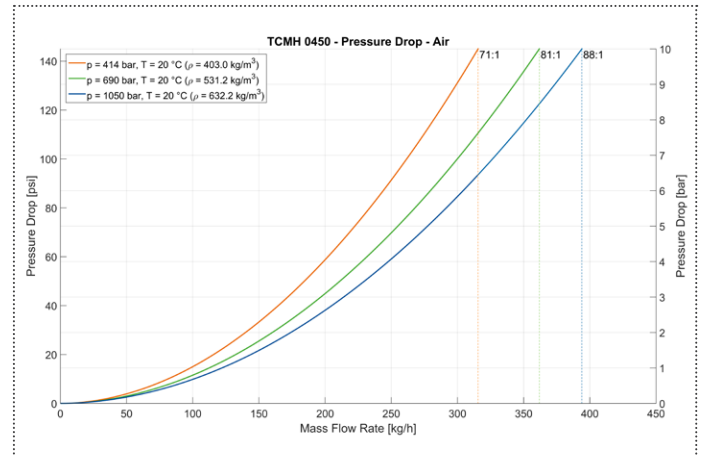

¹⁾ P respectively 1.4404/AISI 316L = NACE compliant, M respectively HP160 = not NACE compliant.
²⁾ Customer specific pressure compensation curves on request.
³⁾ With connector M23 (TCE) and with connector Lemo (TCM), x m cable length (TCC-06-xx).



HIGH PRESSURE | TCMH 0450 Coriolis Mass Flow Meter – Gas

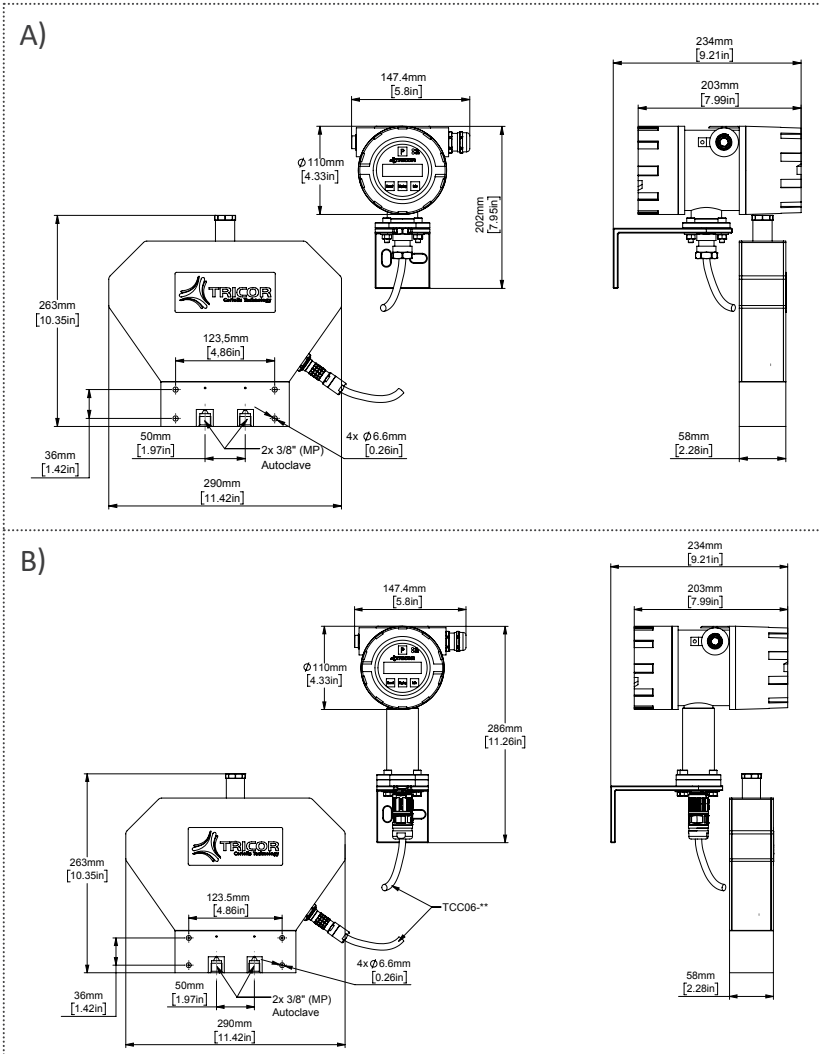

METER DIMENSIONS AND WEIGHTS

A) Ex/Ex1

Weight: 7.5 kg [16.5 lb]

B) Ex3

Weight: 7.5 kg [16.5 lb]

EX-CERTIFICATIONS

ATEX	Zone 1: Group IIC, T2...T4
	Zone 2: II 3G Ex nA IIC T2...T4 Gc
IECEX	Zone 1: Group IIC, T2...T4
cCSAus ⁴⁾	Class 1, Division 1: Group A, B, C, D, T2...T4
ATEX + IECEX + cCSAus triple approval ⁴⁾	Zone 1: Group IIC, T2...T4 Class 1, Division 1: Group A, B, C, D, T2...T4

ELECTRONICS

Power Supply:	24 V DC $\pm 20\%$ or 90 ... 264 V AC
Housing Material:	Aluminum 1.4404 [AISI 316L]
Display:	LCD Display

OUTPUT SIGNALS

Analogue:	2 x 4 ... 20 mA passive two-wire, galvanically free accuracy $\pm 0.05\%$ of f.s. temperature drift 0.05 % per 10 K load $< 620 \Omega$ (with 24 V supply) output value programmable
Frequency/Pulse:	5 - 10,000 Hz active, push pull for flowrate
Status:	push pull programmable

INPUT SIGNALS


Control Input:	0/24 V DC
Analogue (optional):	4 ... 20 mA active for passive 2-wire-pressure sensor supply > 20 V (sensor current 20 mA)
Interfaces:	RS485 RTU (Modbus), optional HART®

PROTECTION CLASS

IP65 (NEMA 4)
IP66 (NEMA 4X) optional

www.tricorflow.com

REMOTE MOUNT⁵⁾

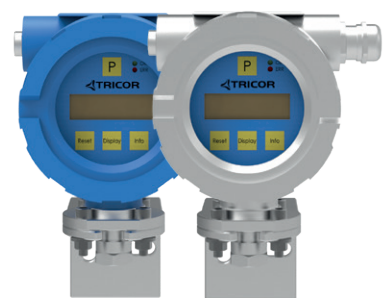

⁴⁾ For cCSAus the electronic is only available in aluminum housing.
⁵⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable,
 Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].



N & S AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
 KEM Küppers Elektromechanik GmbH
 1 Magazine Road #04-01
 Central Mall Office Tower
 Singapore 059567
 +65 6347 6162

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567

REST OF WORLD
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100